

# INDUSTRIAL DOOR


## Order Form

Order No. or name

Quantity

Delivery week

**EN**

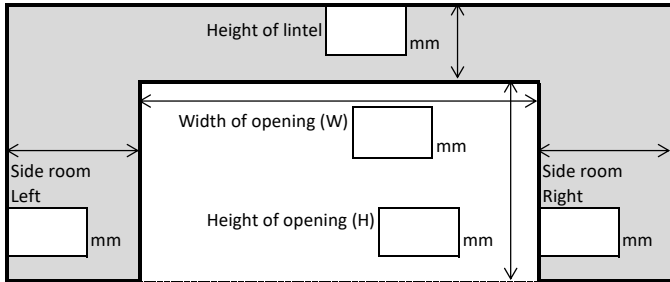

All views are interior views!

- Lift type
- SL350 Standard lift (min. 350 mm)
  - SL420 Standard lift (min. 420 mm)
  - HL High lift
  - HL-T High lift, T-Door
  - VL Vertical lift
  - VL-T Vertical lift, T-Door
  - LL-DT Low lift (min. 200 mm)
  - LL-CE Low lift (min. 230 mm)

- Reinforcing struts  Yes Quantity
- Spring break device  Yes
- Preassembled shaft  Yes, up to 4000x4000
- Bottom bracket  Aluminium
- Cable break security device

In case of requirement for door alignment with other door please clearly specify for which door (order/position).

### STANDARD

- Lamella stucco
- 533; 9010/9002
  - 531; 9002/9002
  - 532; 9006/9002
  - 536; 9007/9002
  - 534; 7016/9002
  - 535; 5010/9002
  - 538; 8014/9002
  - 540; 7021/9002

### PROTECT

- Lamella stucco
- 672; 9010/9010
  - 671; 9002/9010
  - 673; 9006/9010
  - 694; 9007/9010
  - 754; 1021/9010
  - 675; 3000/9010
  - 676; 5010/9010
  - 677; 6009/9010
  - 679; 8014/9010
  - 678; 7016/9010
  - 684; 9005/9010

- V-profile smooth
- 687; 9006/9010
  - 682; 7016/9010
- Flat stucco
- 699; 9010/9010

- Flat smooth
- 667; 9016/9010
  - 668; 7016/9010
  - 680; DB703/9010

- Flat woodgrain
- 669; 9010/9010

- V-profile smooth
- 539; 9006/9002

- Lamella stucco, 80 mm
- 531-80; 9002/9002

Other:

- Painting of panels
- RAL  NCS

- External painting
- Internal painting
- Painting of bottom and top profile

Shade (code)

Shade (code)

Shade (code)

- Wide end caps/double side hinges
- Yes, (default for W>=5000 mm)

### Control

- Manual
- Chain hoist 1:4
- Motor
- Motor supplied by customer

### Operation

- Dead man
- Impuls
- Remote control

### Accessories for motor

- 400V  Control box IP 54
- 230V  Control box IP 65
- Frequency converter
- Helix (spiral) cable
- Wireless transmission (WSD)

### Remote controls

- 3-channels Quantity

- External reflex photocell
- External tripple button switch box

### Traffic light

- Red light
  - Green light
  - Red + green light
- Quantity

### Hanging profiles

- Quantity

### Slide bolts, cylinder locks

- 
- Left  Middle  Right

### Handles (grips)

- 
- Left  Right

### Air grates

- 
- Left  Right
- RAL  NCS
- Shade (code)

### Your notes

### Passdoor

- Height of threshold
- Standard threshold (220 mm)
  - Extra Low Threshold (25 mm)


- Position of passdoor
- Left
  - Middle
  - Right

- Passdoor contact
- Left
  - Right

- Type of handle and lock
- KL 01
  - KL 02
  - KL 03
  - KL 04

- KL 05
- KL 06
- KL 13
- KL 14

- Direction of opening
- hinges on left; DIN right



- Painting of passdoor profiles
- RAL
  - NCS
  - External painting
  - Internal painting

Shade (code)

Shade (code)

### Windows

Section  1 2 3 4 5 6 7 8 9 10 11 Quantity per 1 section

Type of window

### Full Visions sections

Section  1 2 3 4 5 6 7 8 9 10 11

Type of glazing

### Painting of Full Visions' frame

- RAL  NCS
  - External painting
  - Internal painting
- Shade (code)

### Insulated sections

Section  1 2 3 4 5 6 7 8 9 10 11

Type of insulated section

- Painting of fillings
- RAL  NCS

- External painting
  - Internal painting
- Shade (code)

### Expanded mesh sections

Section  1 2 3 4 5 6 7 8 9 10 11

Type of expanded mesh

- RAL
  - NCS
- Shade (code)